




SLIDE-TEC™

SPREADER/BED GRAVITY ENHANCER

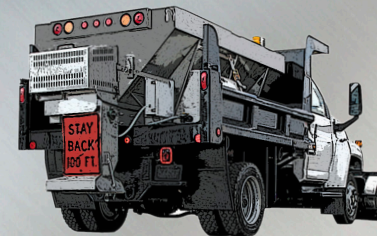

DESCRIPTION: SLIDE-TEC™ was developed to help the hauling and de-icing fleets of State DOT's, County Highway Departments, City Street Departments and Private Contractors to improve their performance and protect their expensive equipment. SLIDE-TEC™ creates a friction resistant shield on your spreaders, truck beds and hoppers that enhances normal gravity flow. Now instead of material like salt, sand, cinders, snow and ice slush bridging, arching and sticking to your equipment, it slides out saving you time, fuel and frustration! In addition, SLIDE-TEC™ provides your expensive equipment with a clear coating that inhibits rust and corrosion. If you haul snow and de-ice roads you need SLIDE-TEC™.

USES: SLIDE-TEC™ is perfect at forcing material to your conveyors, hoppers, augers, snow blowers or out of your dump beds.

METHOD OF APPLICATION: Apply SLIDE-TEC™ with RHOMAR's 3-gallon Public Works Applicator.

APPLICATION OF SLIDE-TEC™: Apply SLIDE-TEC™ to the entire surface area of your spreaders, dump beds, hoppers, augers and snow blowers then concentrate on the seams, corners, and hot spots where sticking occurs.

APPLICATION DURING OPERATIONS: Apply SLIDE-TEC™ and allow to cure one (1) hour if possible. Then reapply a sacrificial coat of SLIDE-TEC™ and again let dry one (1) hour. However, since SLIDE-TEC™ displaces moisture it can be applied to a wet surface during those busy times. Always reapply SLIDE-TEC™ at the first sign of sticking.

APPLICATION FOR STORAGE: Apply a final coat of SLIDE-TEC™ before you store your equipment to inhibit rust and corrosion. New SLIDE-TEC™ goes on clear so it will not effect the aesthetics, plus your equipment will come out of storage ready to roll.

ENHANCES

The natural gravity flow of materials!

ELIMINATES

Bridging & sticking of materials!

IMPROVES PERFORMANCE

By Keeping materials moving!

INHIBITS RUST/CORROSION

With a clear protective coating!

SIMPLY PUT, IT WORKS!!

Sold Exclusively By:
RHOMAR Industries Inc
2107 E Rockhurst St
Springfield MO 65802 USA

NET CONTENTS: 55 Gallons



DANGER

HAZARDS IDENTIFICATION:

Flammable liquid and vapor. May be fatal if swallowed and enters airways. May cause skin and eye irritation. May cause drowsiness or dizziness.

PREVENTION:

Keep away from heat, sparks, open flames and hot surfaces. No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting, and equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Wash face, hands and any exposed skin thoroughly after handling. Avoid breathing mist, vapors or spray. Do not eat or drink while using this product. Wear protective gloves/clothing and eye/face protection.

RESPONSE:

IN CASE OF FIRE: Consider CO2, dry chemical or alcohol resistant foam.

SKIN: Take off contaminated clothing and wash before reuse. Wash with plenty of soap and water. If irritation occurs get medical attention.

EYES: Rinse cautiously with water for several minutes. Remove contact lenses and continue rinsing. Get medical attention if irritation occurs.

INGESTION: Call a poison center or physician if you feel unwell. Rinse mouth.

INHALATION: Remove person to fresh air and keep comfortable for breathing. Call poison center or physician if you feel unwell.

STORAGE: Store in a cool, well-ventilated place and keep containers tightly closed.

DISPOSAL: Dispose of contents and container in accordance with local, regional, national and international regulations.

The recommendations and statements contained herein for use of our products are based on reliable tests, but are not construed as guarantee or warranty either expressed or implied. RHOMAR Industries, Inc. will not be held liable under any circumstances or conditions; either expressed or implied damage in excess of the purchase price of product.

TO REORDER

VISA, MASTER CARD, AND AMERICAN EXPRESS ACCEPTED

1-800-688-6221

solutions@rhomar.com • www.rhomar.com